falmec

GRUPPO INCASSO PLUS

Version
Plus - Built-in 50 cm - Inox - 800 m3/h

Collection
Design

EAN code
8034122367187

The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Optional charcoal filter
Optional remote control
Dimmable led lighting
Dynamic LED Light (2700K - 5600K)
Dialogue system

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h Brushless
KACL.782#49F
Slim motor 800 m3/h
KACL.786#41F
Outdoor extractor fan 1000 m3/h
KACL.796#4AF
Outdoor extractor fan 1500 m3/h
KACL.797#4AF
Remote under-roof motor 1300 m3/h
KACL.798#41F
Remote under-roof motor 950 m3/h
103050091
Round charcoal filter Ø170 mm - Type 6
105080053
Remote control



TECHNICAL FEATURES

Installation type
Built-in
Dimensions
50 cm
Finishing
Scotch brite stainless steel (AISI 430)
Motor
800 m³/h
Type of control
Electronic control
Speed settings
4
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

Gross weight
9.5 kg
Net weight
7.6 kg
Volumes
0.09 m³
Packaging size
Length
610 mm
Height
380 mm
Depth
375 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Current
220-240V
Frequency
50-60Hz
ENERGY CLASS
B

falmec

GRUPPO INCASSO PLUS

Version
Plus - Built-in 50 cm - Inox - 800 m3/h

Collection
Design

EAN code
8034122367187

ENERGY LABEL

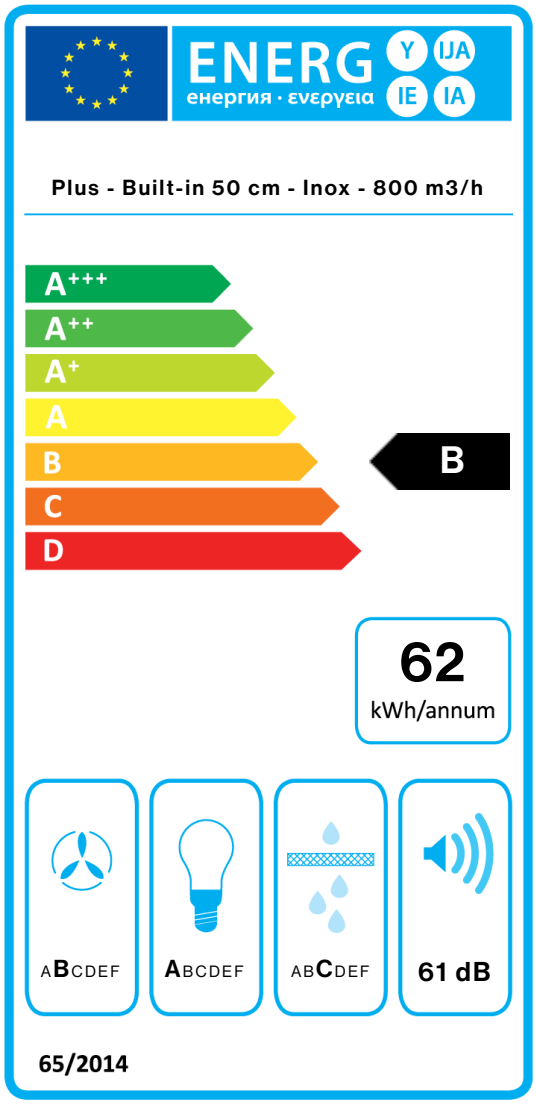

PF		
S	Falmec Spa	
M	Plus - Built-in 50 cm - Inox - 800 m3/h	
AEC	61,9	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	270,0	m³/h
Qmax	470,0	m³/h
Qboost	670,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1.1	
EEI	62,8	
Qbep	333,0	m³/h
Pbep	407	Pa
Qboost	670,0	m³/h
Wbep	147,7	W
WL	3,50	W
Emiddle	115	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.