

Версия	Комфорт - вграден - 120 см - черен - 800 м3/ч
Дизайн	Falmec Lab
Колекция	No-Drop

ТЕХНИЧЕСКИ ХАРАКТЕРИСТИКИ

Материали / покрития	Матово черна боядисана стомана
Технология	Патентована "No-Drop" система против кондензация
Характеристики	Side sound-absorbing panels for noise reduction Suction chamber enlarged Rotatable tempered glass flap with integrated control Protective flaps for the edge of the wall unit Emptyable liquid collector
Контрол	Touch screen контрол
Режим	
Осветление	Динамично LED осветление (2700K-5600K) Регулируема червена светлина Strip Led 5,8 W - 2700 K / 5600 K
Филтри	Метален филтър за мазнини, отстраняем и почистващ се Anti-condensation no-drop filter in technopolymer Регенериращ се въглероден филтър Zeo Microtech (по избор)



Индикативно изображение на продукта. Може да не отговаря на избраната версия

ФУНКЦИИ ЗА СВЪРЗВАНЕ И ПОТРЕБЛЕНИЕ



Максимално потребление	280 W
Напрежение/честота	220-240V 50-60Hz

ENGINE

Мотор	800 m³/h
Максимален дебит	680 m³/h I.E.C.61591
Максимално ниво на звука	63 dB (A)re1pW I.E.C. 60704-2-13
Енергиен клас	A

ТЕГЛА И ОБЕМИ

Брутно тегло	21.9 kg
Нетно тегло	17.4 kg
Обем	0.25 m³
Размери на опаковката	L 1295 x H 412 x P 465 mm




ДОПЪЛНИТЕЛНИ АКСЕСОАРИ


Код	Описание
KACL.1059	Conveyer for air outlet (Ø150)
KACL.1069	Ø150x600 - Звукоизолираща тръба (Virgola Touch Comfort/Virgola No-Drop Comfort)
KCVJN.01#N	KIT CHIMNEY VIRGOLA-MOVE H=120 (W/Packaging) BLACK
KCVJN.00#N	KIT CHIMNEY VIRGOLA-MOVE H=185 + PROL. H=185 (W/Packaging) BLACK

СПЕЦИФИКАЦИИ НА ДВИГАТЕЛЯ

Скорост на двигателя	1	2	3	4
Шум <i>dB(A) re1pW l.E.C. 60704-2-13</i>	51	57	63	67
Обхват	305	423	553	680
Максимално налягане (<i>Pa</i>)	410	440	460	480
Мощност на двигателя (<i>W</i>)	150	180	200	215
Изход за въздух	150	150	150	150

ДЕБИТ/НАЛЯГАНЕ

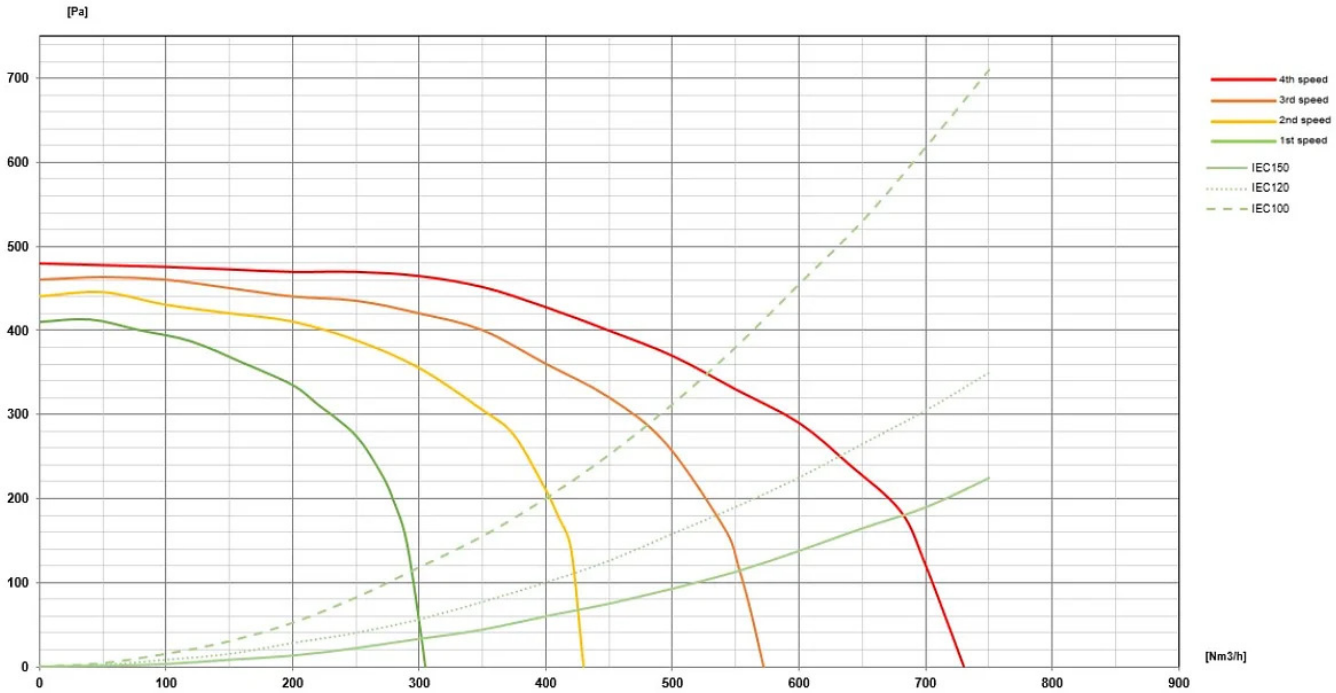

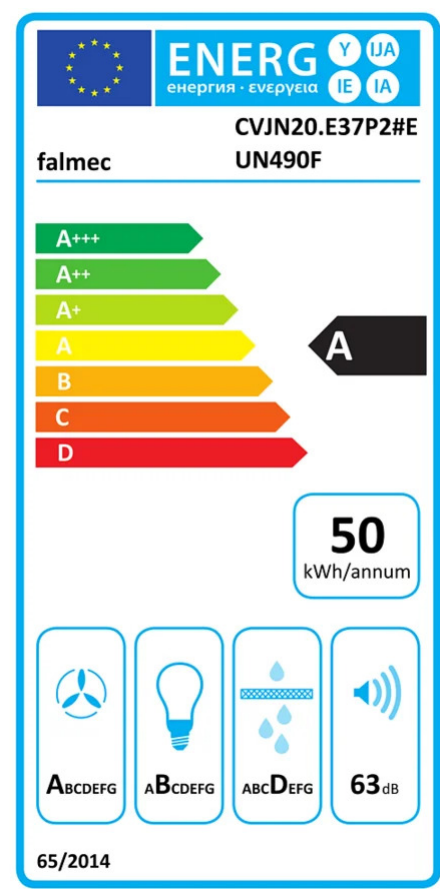

PF		
S	Falmec Lab	
M	Комфорт - вграден - 120 см - черен - 800 м3/ч	
AEC	49.90	kWh/a
EEC	A	
FDE	30.50	
FDEC	A	
LE	21.20	
LEC	B	
GFE	70	
GFEC	D	
Qmin	305	m³ /h
Qmax	553	m³ /h
Qboost	680	m³ /h
SPEmin	51	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO		
PS	0.28	W
PI		
F	0.90	
EEL	52.60	
Qbep	374	m³ /h
Pbep	408	Pa
Qboost	680	m³ /h
Wbep	139	W
WL	5.80	W
Emiddle	123	lux
Lwa-SPEmax	63	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.